



FOR HULL

ANODES TO BOLT ON

Type	L	l	h	P.C.D	Drilling Ø	Weight kg	OEM Reference	Maucour Reference
VETUS	150	60	25	80	11 x 15	0.970	15	ANOZVET1
VETUS	240	65	29	140	13 x 25	2.300	25	ANOZVET2
VETUS	290	55	30	200	13 x 25	2.700	32	ANOZVET3
VETUS	350	72	35	200	13 x 25	4.500	38	ANOZVET4
HYDROMARINE	115	65	30	40	11	0.990	/	ANOZHY
SEA RAY	200	110	30	130	13	3.800	/	ANOZSR
FAIRLINE	200	65	32	110	12	1.300	/	ANOZFL1
FAIRLINE	320	65	35	160	12 x 65	2.195	/	ANOZFL2
FAIRLINE	310	75	40	205	13 x 25	4.000	/	ANOZFL3
FAIRLINE	455	90	40	230	19	7.000	/	ANOZFL4



VETUS



HYDROMARINE



SEARAY



FAIRLINE 1



FAIRLINE 2




FAIRLINE 3



FAIRLINE 4

Dimensions (mm)	Ingots			Reference
	P.C.D.	Drilling Ø	Weight kg	
75 x 34 x 16	133	9 x 20	0.250	ANOZABLG0250
95 x 34 x 17	117	7 x 25	0.260	ANOZABLG0260
95 x 40 x 25	129	9 x 20	0.500	ANOZABLG0500
120 x 46 x 35	180	13 x 25	1.100	ANOZABLG1100
141 x 66 x 25	180	13 x 25	1.040	ANOZABLG1040
140 x 82 x 26	180	13 x 25	1.900	ANOZABLG1900

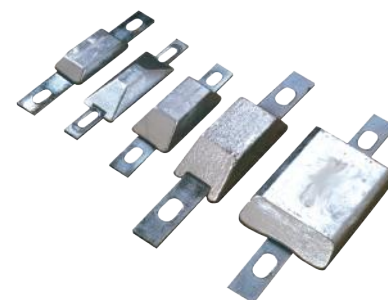

Dimensions (mm)	Plates				Reference
	P.C.D.	Drilling Ø	Weight kg	Insert	
147 x 65 x 22	70	13 x 25	1.200	Avec	ANOZABPL1200
180 x 65 x 30	104	13 x 25	2.000	Avec	ANOZABPL2000
190 x 65 x 30	102	13 x 15	2.250	Avec	ANOZABPL2250
200 x 80 x 22	110	13 x 25	2.500	Avec	ANOZABPL2500
200 x 100 x 23	100	10.5	3.200	Sans	ANOZABPL3200
490 x 48 x 20			3.200	Sans	ANOZABPL3200B
280 x 85 x 30	160	13 x 25	4.000	Avec	ANOZABPL4000
210 x 100 x 30	110	19 x 25	4.200	Avec	ANOZABPL4200
220 x 100 x 30	120	10.5	4.300	Sans	ANOZABPL4300
400 x 80 x 30	250	10.5	7.000	Sans	ANOZABPL7000
455 x 100 x 50	230	22 x 30	14.860	Avec	ANOZABPL14860



Ce document n'est pas contractuel - This document is not contractual



Pear Anodes					
Dimensions (mm)	Insert	Drilling Ø	P.C.D.	Weight kg	Reference
120 x 78 x 25	265 x 25 x 5	13 x 25	200	1.000	ANOZABPO1000
165 x 100 x 42	265 x 25 x 5	13 x 25	200	3.000	ANOZABPO3000




ANODES TO BE WELD

Plates					
Dimensions (mm)	P.C.D.	Drilling Ø	Weight kg	Insert	Reference
147 x 65 x 22	70	13 x 25	1.200	Avec	ANOZASPL1200
180 x 65 x 30	104	13 x 25	2.000	Avec	ANOZASPL2000
190 x 65 x 30	102	13 x 15	2.250	Avec	ANOZASPL2250
200 x 80 x 22	110	13 x 25	2.500	Avec	ANOZASPL2500
280 x 85 x 30	160	13 x 25	4.000	Avec	ANOZASPL4000
210 x 100 x 30	110	19 x 25	4.200	Avec	ANOZASPL4200
455 x 100 x 50	230	22 x 30	14.860	Avec	ANOZASPL14860



Pear Anodes			
Dimensions (mm)	Insert	Weight kg	Reference
120 x 78 x 25	230 x 25 x 5	1.000	ANOZASPO1000
140 x 90 x 35	250 x 25 x 5	1.800	ANOZASPO1800
165 x 100 x 42	250 x 25 x 5	3.000	ANOZASPO3000

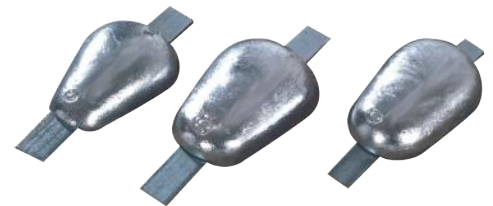

Ingots			
Dimensions (mm)	Insert	Weight kg	Reference
190 x 50 x 26	300 x 25 x 5	1.600	ANOZASLG1600
200 x 60 x 32	300 x 25 x 5	2.400	ANOZASLG2400



SUSPENDED ANODES

Material	Ø	Ø1	h	Weight kg	Cable Length in m	Reference
Zinc	80	53	105	2.500	4.5	ANOZAPZN2500
Aluminium	80	53	105	1.000	4.5	ANOZAPAL1000
Magnesium	80	53	105	0.900	4.5	ANOZAPMA0900



Material	Dimensions	Weight kg	Cable Length in m	Reference
Zinc	190 x 38 x 19	0.9	4.5	ANOZAPZN0900

