



GTX SEALS

The GTX seal, manufactured from high performance materials, gives a perfect watertight seal. GTX seal is fitted with a reinforced neoprene hose and stainless steel clamps and is very easy to install. It should be regularly greased.

Sizes available : For shaft diameter from 40 mm
Application: Workboats - Fast cruisers


Description:

- | | |
|---------------|------------------------|
| 1. O'Rings | 6. Fluorescent bearing |
| 2. Sleeve | 7. Body |
| 3. SST clip | 8. Greaser |
| 4. Lips seals | 9. Hose and clamps |
| 5. SST ring | 10. Allen wrench |



COMPLETE GTX

SHAFT Ø	TUBE Ø	D	A	L	Reference
40	60/63	75	95	198	GTXC013004001
45	70/73	80	97	200	GTXC013004501
50	80/83	85	107	225	GTXC013005001
55	85/88	100	112	225	GTXC013005501
60	90/93	105	112	230	GTXC013006001
70	100/103	116	112	230	GTXC013007001
80	110/113	124	127	265	GTXC013008001
90	120/123	132	127	265	GTXC013009001
100	130/133	140	132	275	GTXC013010001

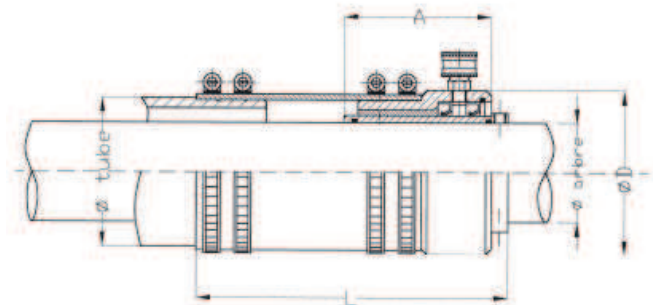

GTX SPARE PARTS KITS

You must regularly check the condition of your GTX seal and change replacement parts when it is necessary:

- Spare Kit N° 1 : Lip seals - O'rings - Stainless steel clip
- Spare Kit N° 2 : Stainless steel sleeve (c/w O'rings)
- Spare Kit N° 3 : Body fitted with the Fluorescent bearing – Lip seals - Greaser

SHAFT Ø	Spare Parts Kit N°1	Spare Parts Kit N°2	Spare Parts Kit N°3
40	GTXX1 13004001	GTXX2 13004001	GTXX3 13004001
45	GTXX1 13004501	GTXX2 13004501	GTXX3 13004501
50	GTXX1 13005001	GTXX2 13005001	GTXX3 13005001
55	GTXX1 13005501	GTXX2 13005501	GTXX3 13005501
60	GTXX1 13006001	GTXX2 13006001	GTXX3 13006001
70	GTXX1 13007001	GTXX2 13007001	GTXX3 13007001
80	GTXX1 13008001	GTXX2 13008001	GTXX3 13008001
90	GTXX1 13009001	GTXX2 13009001	GTXX3 13009001
100	GTXX1 13010001	GTXX2 13010001	GTXX3 13010001